

# Thermostat Probes Datasheet



## Overview

NTC probes are used for temperature measurement with thermostats.


<b>NTC - APT - 1.5T</b>	Air probe, thermoplastic shell, 1.5m thermoplastic cable.
<b>NTC - APP - 1.5P</b>	Air probe, plastic shell, 1.5m PVC cable.
<b>NTC - LPS - 1.5S</b>	Liquid probe, stainless steel shell, 1.5m silicone cable.
<b>NTC - APS - 1.5S</b>	Air probe, stainless steel shell, 1.5m silicone cable.

## Technical Properties


Sensor Type	Sensor Code	Range	Accuracy
NTC	NTC - APT - 1.5T	50...+105°C	±0.5°C
NTC	NTC - APP - 1.5P	-30...+80°C	±0.5°C
NTC	NTC - LPS - 1.5S	-60...+150°C	±0.5°C
NTC	NTC - APS - 1.5S	-60...+150°C	±0.5°C

## Technical Drawings


Thermoplastic Air Probe

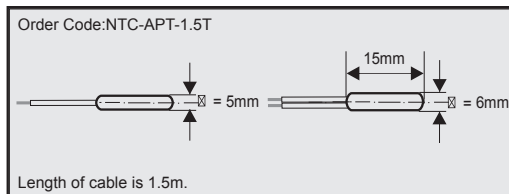


Plastic Air Probe

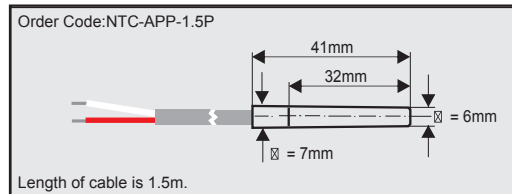

Stainless Steel Air Probe

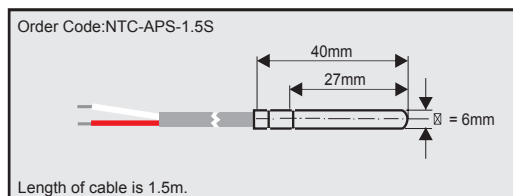

Stainless Steel Liquid Probe

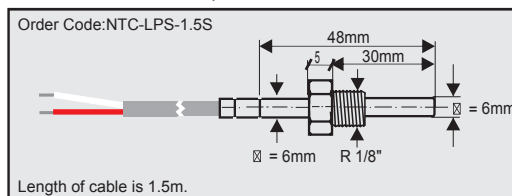

## Contact



**Email:** [Enquiries@West-CS.com](mailto:Enquiries@West-CS.com)

**Website:** [www.West-CS.co.uk](http://www.West-CS.co.uk)



**Telephone:** +44 (0)1273 606271

**Fax:** +44 (0)1273 609990



**Address:** The Hyde Business Park  
Brighton, East Sussex  
BN2 4JU  
United Kingdom

**WEST**  
Control Solutions